

FRONTAL MAGNETIC POUCH

MANUAL



If you need any support with your
product please contact us at:
productsupport@gugaribas.com.br

SUMMARY

FRONTAL MAGNETIC MAGAZINE POUCH PARTS	5
1. Installation	6




FRONTAL MAGNETIC MAGAZINE POUCH PARTS

- 1. rod (stem?)
- 2. magnet
- 3. M5x12 flat head screws (2 units)
- 4. M5 hex nut screws (2 units)

1. INSTALLATION

ATTENTION! You are dealing with a strong, powerful magnet. Keep it away from electronic and metallic devices. If you have more than one magnet, ensure that they are not close to each other, and that they are not getting stuck together eventually hurting your hand.


ATTENTION! After this installation it will not be possible to adjust the Standard Magazine Pouch to the perpendicular position as shown in stage 3.1.



To install the frontal magnetic magazine pouch keep it open as done in step 2.



Secure the rod with the **M5x12 flat head screws** (ref.: p.24, photo 41, item 3) and the **M5 hex nut screws** (ref.: p.24, photo 41, item 4) from inside (as shown in photo 44) until they are secure.

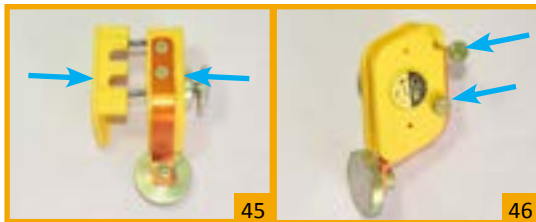

To close the magazine pouch and finish the adjustment, put back the sides female and male together again introducing the springs (photo 45) and tightening back the external adjustment screws (photo 46).//

CONGRATULATIONS!

Your magazine pouch
is now ready for use.

